

VAR 2-170



Diesel - Qmax 49 m³/h (220 USgpm) - Hmax 48 m (158 ft)



VAR - Self-priming centrifugal pumps

These self-priming centrifugal pumps are for applications where the main feature is the difficulty in priming. Even with suction heights of several meters the machine quickly evacuates the air from the suction pipe and starts pumping. Additionally, thanks to the semi-open impeller, the VAR range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The VAR range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Rapid self-priming

Without foot valve up to a height of 7.5 m (24.5 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 13 mm (0.5")

Easy maintenance

Removable front cover for direct access to the impeller

Wear plate

Cast iron (G10 rubber lined) or stainless steel wear plate, that are easily replaceable

VAR 2-170

Performance curves


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m³

Spherical solids handling: D.13 mm (0.5")

Priming time: 25 s from 1,5 m (4.9 ft)

Max absorbed power: 6,0 kW - 8.0 HP (3.300 rpm)

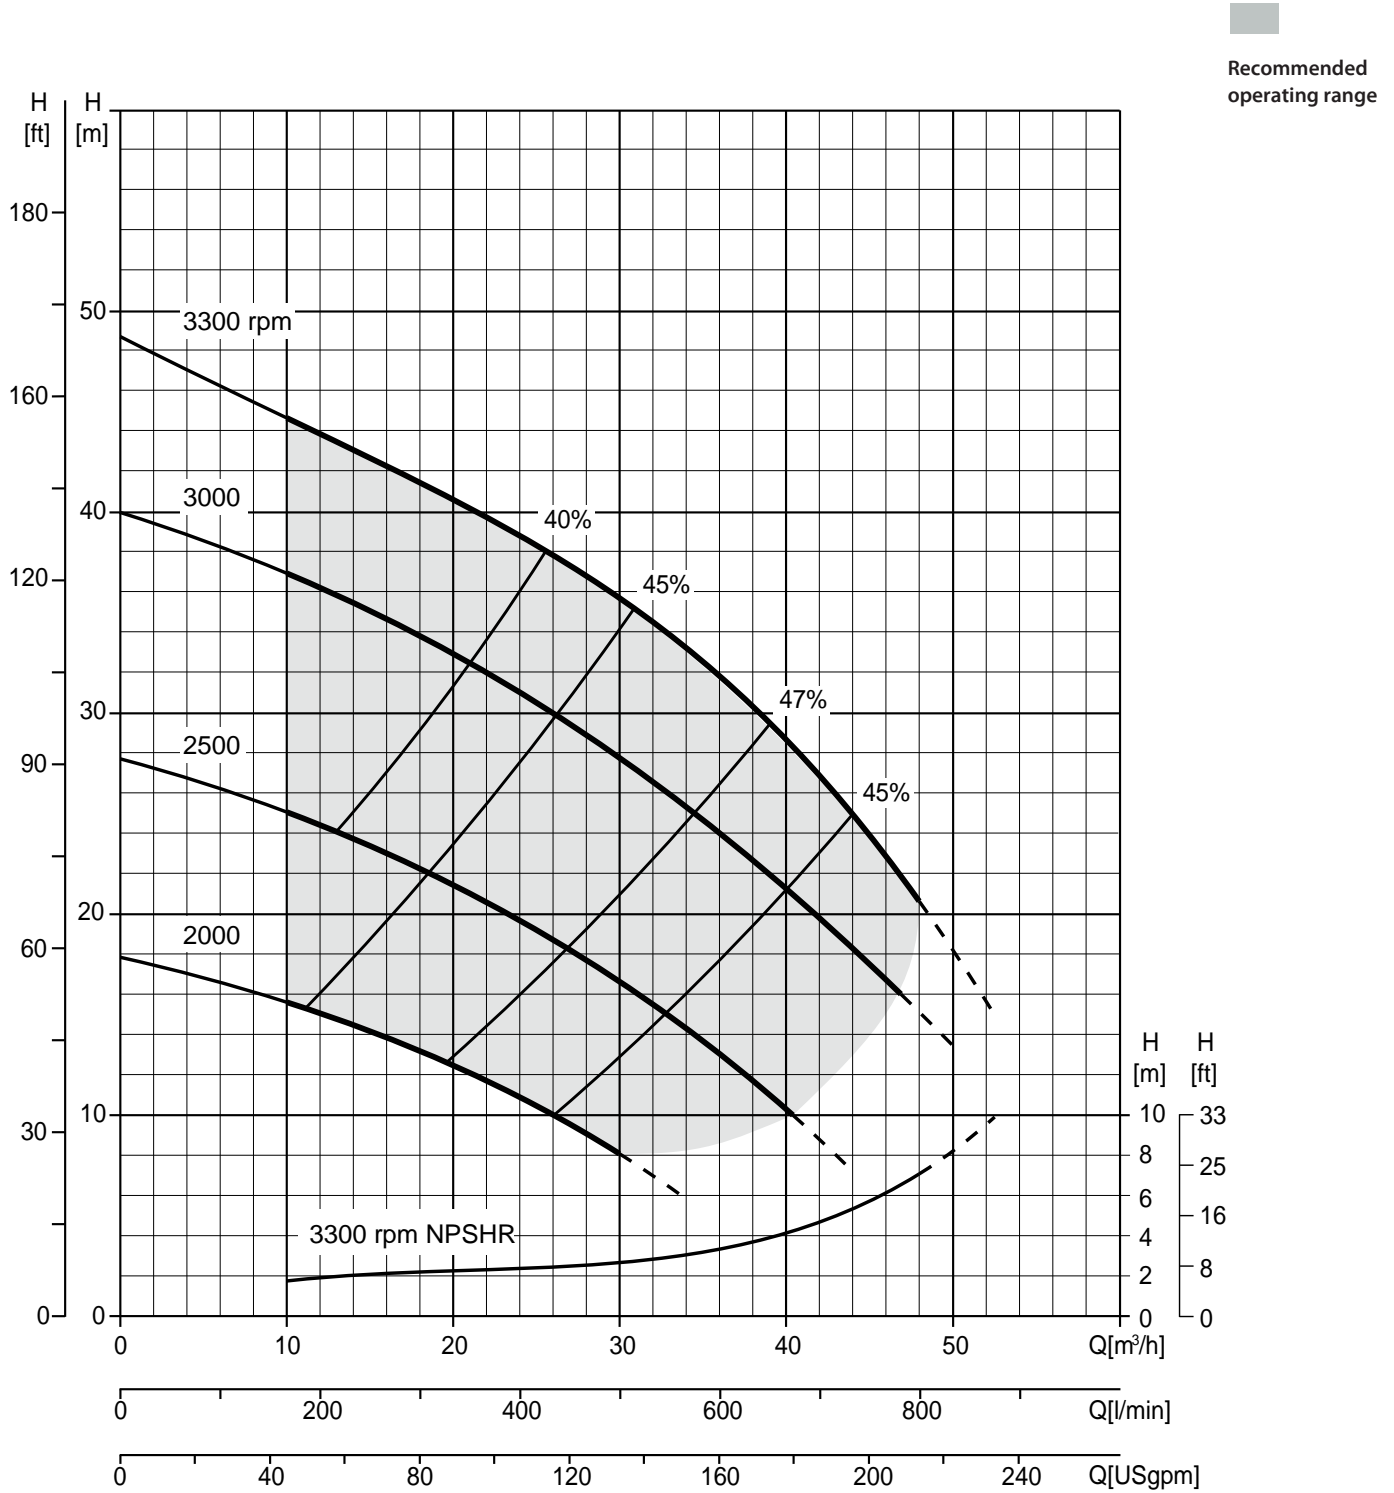

VAR 2-170

Technical data

Pump

Model	VAR 2-170
Qmax	49 m ³ /h - 820 l/min (200 USgpm)
Hmax	48 m (157 ft)
Q max eff.	39 m ³ /h - 650 l/min (200 USgpm)
Eff. max	47 %
Suction port	Threaded - 2" BSP
Delivery port	Threaded - 2" BSP
Impeller type	Semi-Open, 4 vane
Solids handling	13 mm (0.5 ")
Material	G10
Casing	EN-GJL-200 cast iron
Impeller	EN-GJS-500 ductile iron
Wear plates	EN-GJL-200 rubber lined cast iron
Number of plates	1
Shaft	C45 steel
Mechanical seal	Silicon carbide / Silicon carbide
Elastomers	NBR

Engines

Make	Kohler				Kohler			
Model	15LD440 (KL24)				15LD440 (KL27)			
Type	Diesel direct injection, aspirated				Diesel direct injection, aspirated			
Displacement	442 cm ³ (27 in ³)				442 cm ³ (27 in ³)			
No. cylinders	1				1			
Cooling	Air				Air			
Rpm type	Variable				Variable			
Standard speed	3.300 rpm				3.300 rpm			
EU emissions	N/Em				N/Em			
US emissions	EPA Tier I				EPA Tier I			
Starting	Recoil				Electric			
Starting voltage					12 V			
Oil change interval	250 h				250 h			
Market	UE				UE			
Speed [rpm]	2000	2500	3000	3300	2000	2500	3000	3300
Consumption [l/h]	1,2	1,5	1,7	1,8	1,2	1,5	1,7	1,8
Power [kW]	4,4	5,5	6,2	6,5	4,4	5,5	6,2	6,5
Power [HP]	5.9	7.4	8.3	8.7	5.9	7.4	8.3	8.7

VAR 2-170

Arrangements

Technical data

Material	S275JR EN 10025-2 carbon steel
Coatings	Bicomponent, average thickness of 80 µm
Color	Yellow and grey Atlas Copco (standard)
Features	Galvanised steel frame: chassis, lifting bar, adjustable handle, support foot. Tractor tires.
Tank	5 l (1.3 USG)

VAR 2-180 D TROLLEY - R



Dimensions	610 x 765 x 980 mm
	24 x 30 x 39 "
H suction port	0,53 m (1.7 ft)
Weight (KL24)	150 kg (330 lb)

VAR 2-180 D TROLLEY - E



Dimensions	610 x 945 x 980 mm
	24 x 37 x 39 "
H suction port	0,53 m (1.7 ft)
Weight (KL27)	160 kg (350 lb)

AUTORYZOWANY PARTNER:

TECHBUD
SILNIKI • MASZYNY BUDOWLANE • DROGOWE • AGREGATY

Techbud Sp. z o.o.
ul. Gorzowska 12
65-127 Zielona Góra

tel. +48 68 470 72 50
fax +48 68 470 72 51
www.techbud.eu
techbud@techbud.eu